

GVT / PGVT
1200x1800 mm



EXTENDED &

EXTRA SPACE

CLASSIC, MODERN
AND CHICK:
A COLLECTION THAT
MEETS THE NEEDS
OF DESIGN.

THINQ SLAB is a combination of versatility, technical and aesthetic performance a result of the most advanced production technologies. THINQ SLAB brings out the new concept of continuous surfaces and are designed for any type of application.



1200x1800 mm
120x180 cm



Slab format



Taking into account the new demands of the world of architecture and interior design, Our launches new formats of slim slab marble tiles in large dimensions with the additions of 1200x1200mm expanding its range of technical solutions & innovation for better lifestyle.


THINO SLAB

EVOLUTION OF THE TILES

120x180 cm

POLISHED GLAZED VITRIFIED TILES /
GLAZED VITRIFIED TILES

AVAILABLE SIZES:

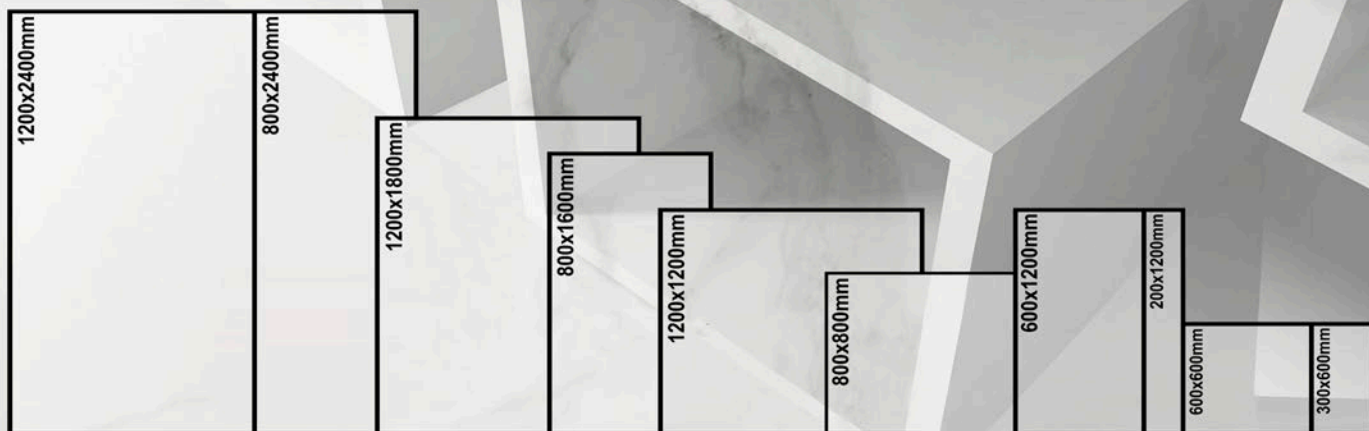

Technical Features

The significant life events of this tile collection flawlessly support today's modern lifestyle, with qualities such as scratch resistance, germ resistance, stain resistance, and more.



Scratch
Resistance



Fire
Resistance



Frost
Resistance



Stain
Resistance



Dimensional
Stability



Germ
Resistance




Chemical
Resistance



Water
Resistance



**ANTIQUÉ
ORO**

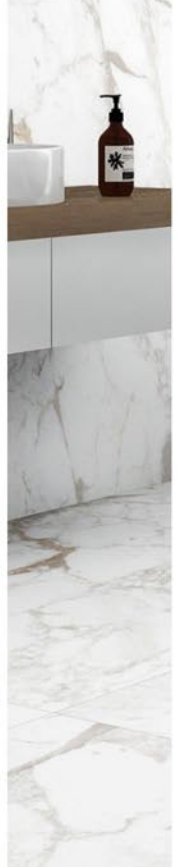

Matt
Finish

**1200 x
1800mm**



Experience The
Luxury Perfection



ARTISIAN GOLD




Matt
Finish

1200 x
1800mm



Experience The
Luxury Perfection

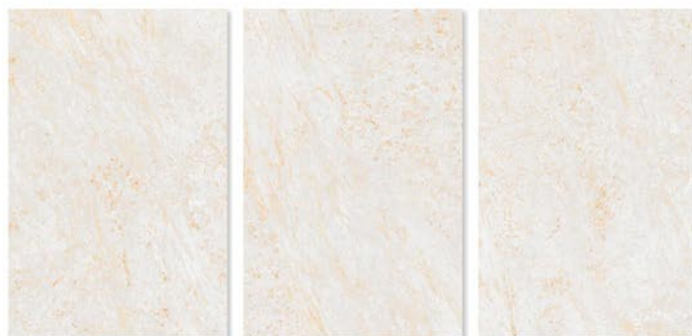

**CANYON
BIANCO**




Matt
Finish

**1200 x
1800mm**



Experience The
Luxury Perfection



ARTISIAN WHITE




Matt
Finish

1200 x
1800mm



Experience The
Luxury Perfection

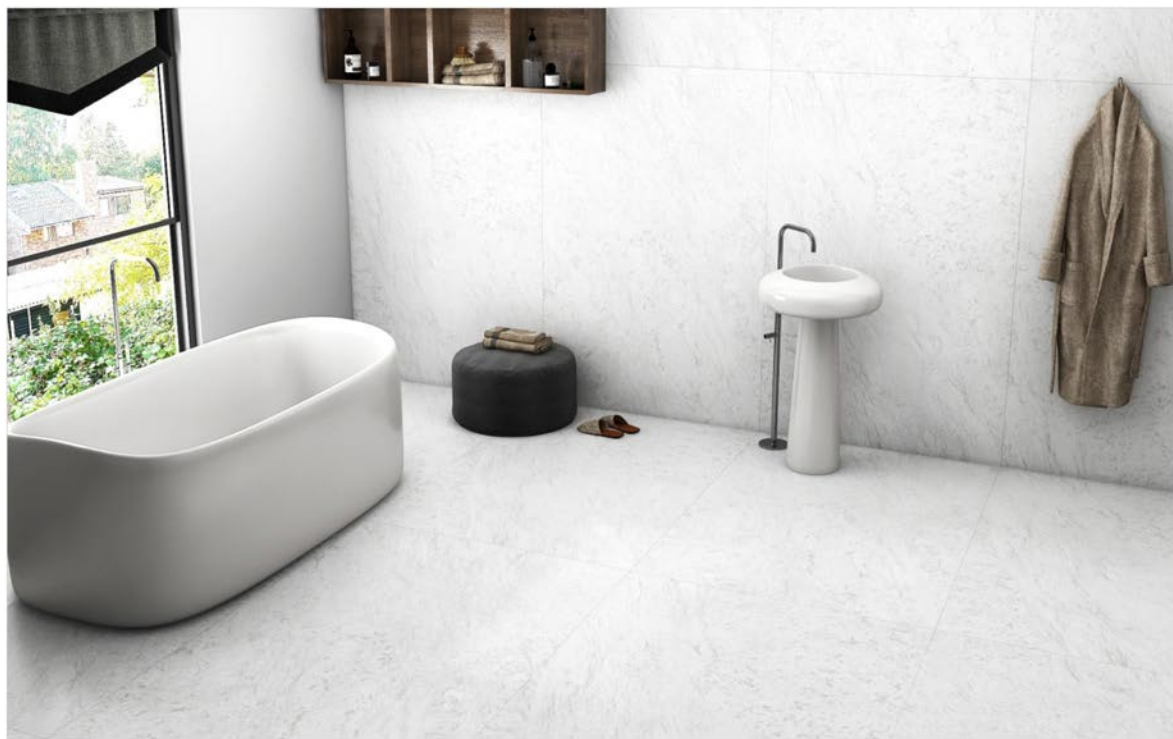

**CRESTOLA
BIANCO**



Matt
Finish

**1200 x
1800mm**





Experience The
Luxury Perfection



**DUST
BEIGE**



Matt
Finish

1200 x
1800mm






Experience The
Luxury Perfection



**DUST
BIANCO**

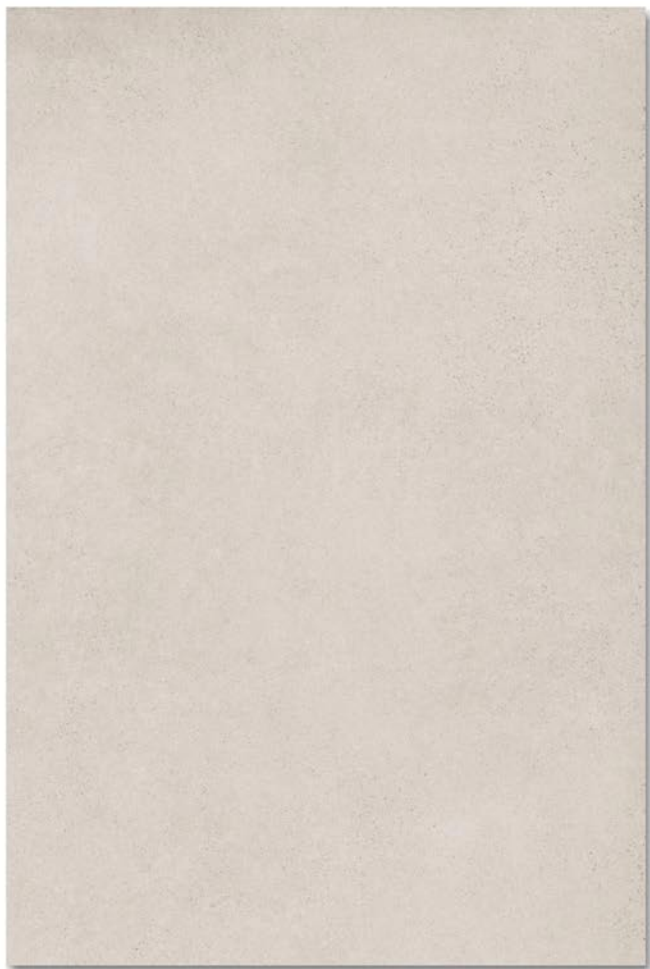

Matt
Finish


1200 x
1800mm



Experience The
Luxury Perfection



**DUST
GREY**

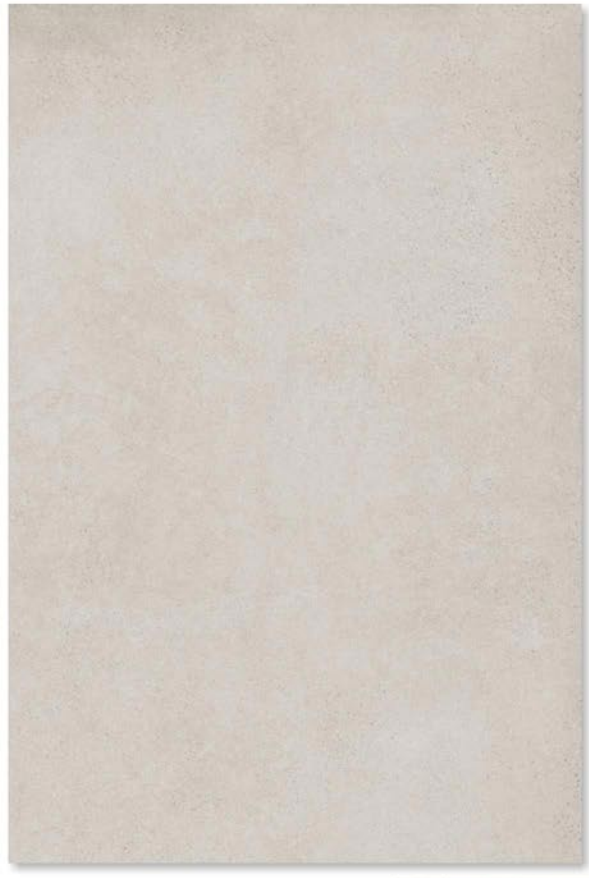

Matt
Finish


1200 x
1800mm



Experience The
Luxury Perfection



**ESCARA
BEIGE**

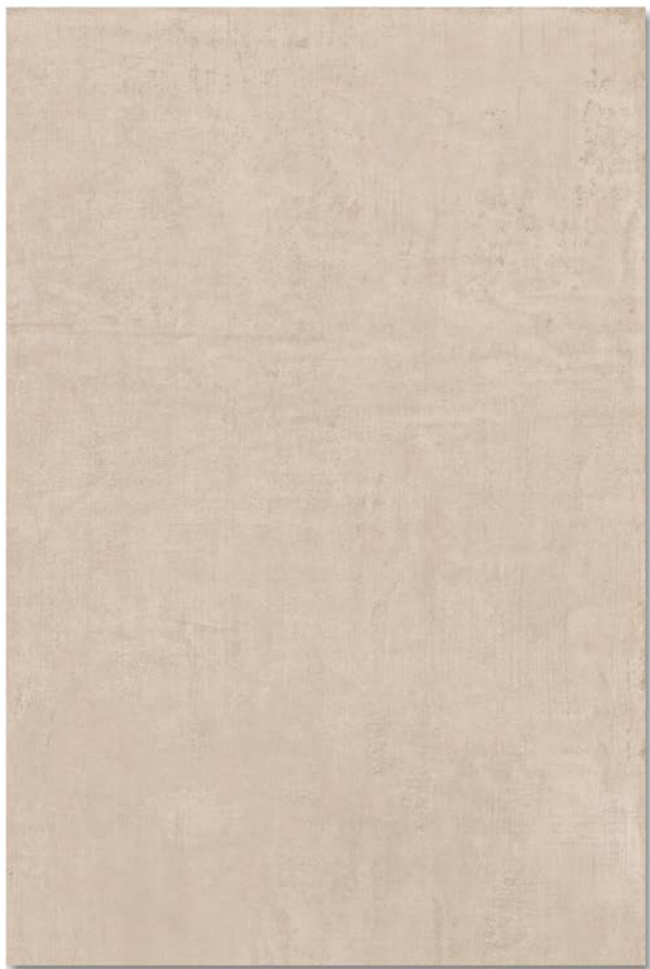

Matt
Finish


1200 x
1800mm



Experience The
Luxury Perfection



**ESCARA
BIANCO**

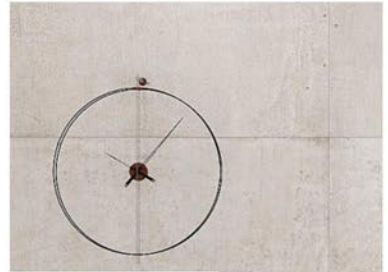

Matt
Finish

1200 x
1800mm



Experience The
Luxury Perfection




**ESCARA
GREY**



Matt
Finish

1200 x
1800mm



Experience The
Luxury Perfection



**LEXITON
GREY**



Matt
Finish

**1200 x
1800mm**






Experience The
Luxury Perfection



**LEXITON
BROWN**

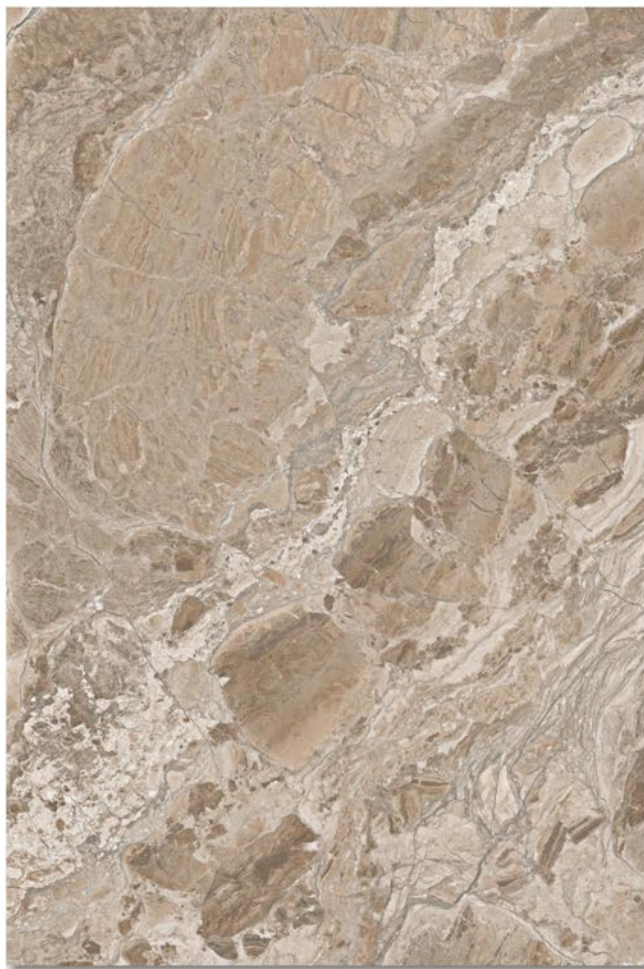

Matt
Finish

1200 x
1800mm



Experience The
Luxury Perfection



**PARSIAN
GREY**




Matt
Finish

1200 x
1800mm





Experience The
Luxury Perfection

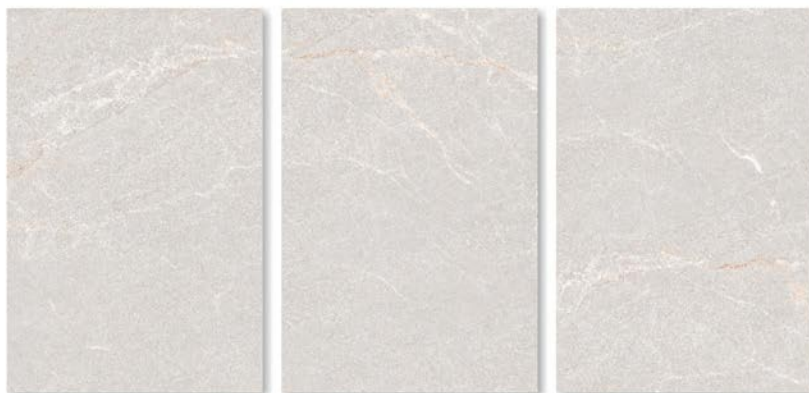

**PARSIAN
BEIGE**



Matt
Finish




1200 x
1800mm



Experience The
Luxury Perfection



**STONELA
TOBACCO**

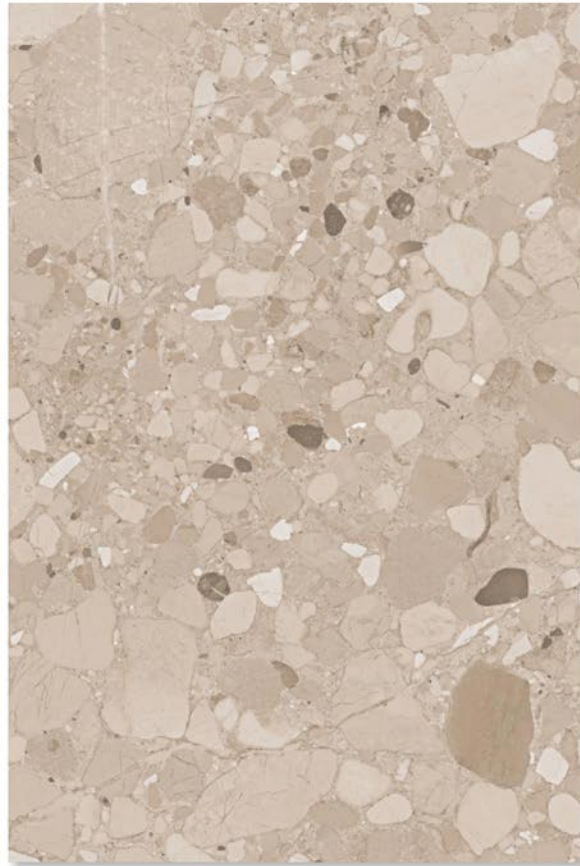


Matt
Finish


1200 x
1800mm



Experience The
Luxury Perfection



**STONELA
GREY**

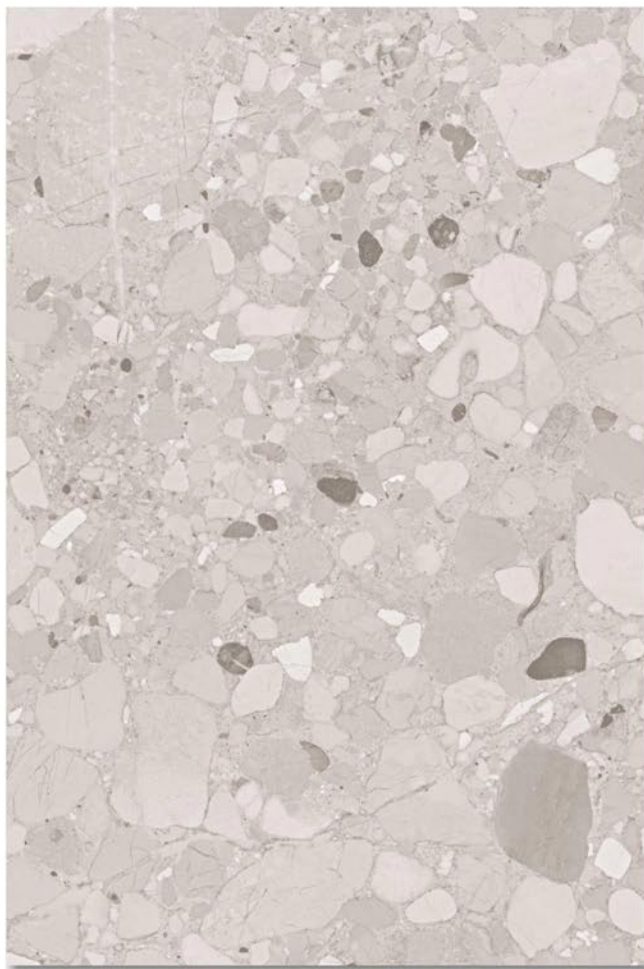

Matt
Finish

1200 x
1800mm



Experience The
Luxury Perfection




Technical Specification

CHARACTERISTIC	INTERNATIONAL STANDARD ISO13006:2012/EN14411 Group BIa	MEAN VALUE	TEST METHOD
Dimension & Surface Quality			
length	± 0.60 %	± 0.10 %	ISO 10545-2
Thickness	± 5.00 %	± 3.00 %	ISO 10545-2
Straightness in side	± 0.50 %	± 0.10 %	ISO 10545-2
Rectangularity	± 0.50 %	± 0.10 %	ISO 10545-2
Surface flatness	± 0.50 %	± 0.510 %	ISO 10545-2
Surface quality	Declared by Manu.	95~105 %	ISO 2813(Gloss Meter)
Glossiness (only Polished Products)	Min. 95% Tile Should Be Free From Defects	Min. 98% Tile Should Be Free From Defects	ISO 10545-2
Physical Characteristics			
Water absorption	$E \leq 0.5 \%$	$E \leq 0.5 \%$	ISO 10545-3
MOH'S hardness	≤ 6	≤ 6	ISO 10545-3
Moisture expansion	Nil	Nil	ISO 10545-10
Abrasion resistance	Declared by Manu.	Pei 3~5 (Declared on product)	ISO 10545-7
Mechanical Characteristics			
Flexural strength(MOR)	$\geq 35\text{N/mm}^2$ (350kg/cm ²)	$\geq 37\text{N/mm}^2$ (370kg/cm ²)	ISO 10545-4
Breaking strength	1300 Newton	2000 Newton	ISO 10545-4
Impact resistance	Declared by Manu.	No indentation or cracking	ISO 10545-5
Safety Characteristics			
Skid resistance(Dynamic Friction Coefficient)	≥ 0.4	≥ 0.4	ISO 10545-17
Density	$\geq 2.0 \text{ gm/cc}$	$\geq 2.3 \text{ gm/cc}$	DIN 51082
Thermo Photo Characteristics			
Thermal shock resistance	Resistant to 10 cycles	Pass Min. 10 cycles	ISO 10545-9
Frost resistance	Frost Proof	Need to comply with the standard	ISO 10545-12
Coefficient of Linear thermal Expansion	$9 \times 10^{-6} \text{ K}^{-1}$	$< 5.86 \times 10^{-6} \text{ K}^{-1}$	ISO 10545-8
Color resistance to UV light	Resistant	Resistant	ISO 10545-16
Chemical Characteristics			
Chemical resistance: House Hold Chemicals & Swimming Pool Salts	Min. Class - GB	Confirm to Classes - GA	ISO 10545-13
Chemical resistance: Low Concentrations Acids & Alkalis	Min. Class - GIB	Confirm to Classes - GIA	ISO 10545-13
Chemical resistance: High Concentrations Acids & Alkalis	Min. Class - GHB	Confirm to Classes - GHA	ISO 10545-13
Stain resistance	Min. Class - 3	Min. Confirm to Class - 4	ISO 10545-14

Packing Details

DIMENSION(MM)	1200x1800mm
SLAB / BOX	2 pc
COVERAGE AREA / BOX	4.32 sq. mtr.
WEIGHT / BOX (APPROX)	90 kg

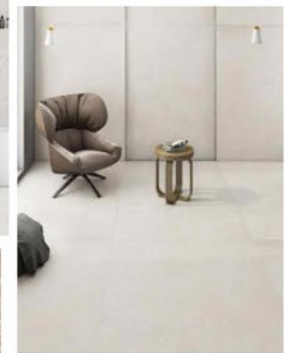

Experience The
Luxury Perfection





AAJVETO MANUFACTURING PVT. LTD.

Lakhadhirnagar, navagam road, morbi - 363 641, (Gujarat) INDIA.
info@ajvetoceramic.com | www.ajvetoceramic.com